


(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property Organization
International Bureau(43) International Publication Date
18 December 2003 (18.12.2003)

PCT

(10) International Publication Number
WO 03/104005 A1

- (51) International Patent Classification⁷: **B60J 5/06**
- (21) International Application Number: **PCT/CA03/00890**
- (22) International Filing Date: **6 June 2003 (06.06.2003)**
- (25) Filing Language: **English**
- (26) Publication Language: **English**
- (30) Priority Data:
60/387,451 **11 June 2002 (11.06.2002)** **US**
- (71) Applicant (for all designated States except US): **INTIER AUTOMOTIVE CLOSURES INC. [CA/CA]; 521 Newpark Boulevard, Newmarket, Ontario L3Y 4X7 (CA).**
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **OXLEY, Peter, Lance [CA/CA]; 18342 9th Line, R.R. #2, Mount Albert, Ontario L0G 1M0 (CA). LEJBJUK, Peter, Adam [CA/CA]; 3 Richdale Court, Etobicoke, Ontario M9B 5Y8 (CA). MRKOVIC, Dragan [CA/CA]; Apt. 301, 1175 Broadview Avenue, Toronto, Ontario M4K 2S9 (CA).**
- (74) Agent: **IMAI, Jeffrey, T.; Magna International Inc., 337 Magna Drive, Aurora, Ontario L4G 7K1 (CA).**
- (81) Designated States (national): **AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NO, NZ, OM, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.**
- (84) Designated States (regional): **ARIPO patent (GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).**
- Published:
— with international search report
- For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

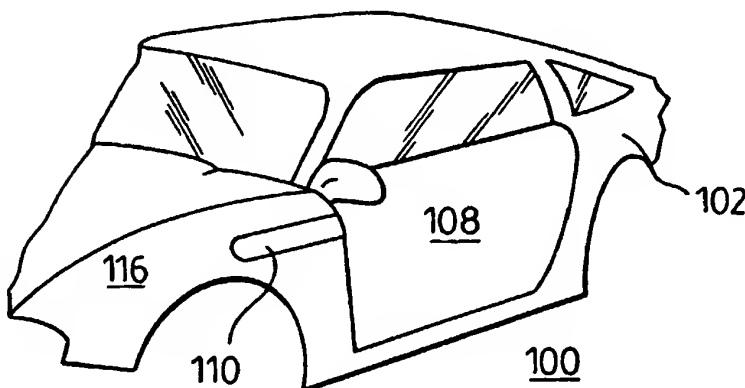(54) Title: **VEHICLE DOOR WITH PIVOT ARM**

(57) Abstract: A vehicle door (108) for fitting to a vehicle body (102) includes a vehicle door frame, and a pivot arm (110) coupled to the door frame. The door frame includes an upper portion (142), a lower portion (144), and a pair of opposite sides (146, 148) extending between the upper and lower portions (142, 144). The pivot arm (110) is coupled to the door frame adjacent one of the opposite sides (146), and includes a pair of opposite ends. One of the ends of the pivot arm (110) includes a first hinge (113) for pivotally coupling the pivot arm (110) to the vehicle body (102) about a first pivot axis. The other end includes a second hinge (115) pivotally coupling the door frame to the pivot arm (110) about a second pivot axis.

WO 03/104005 A1

VEHICLE DOOR WITH PIVOT ARM

FIELD OF THE INVENTION

- 5 [1] This invention relates to a vehicle door, and more particularly, to a vehicle door pivot arm pivotally and slidably secured to a vehicle body.

BACKGROUND OF THE INVENTION

- 10 [2] A conventional vehicle passenger door typically includes a pair of hinges attached between the door frame and the vehicle body. The door swings outwardly from the vehicle body, from a closed position to an open position. However, this arrangement has some disadvantages. For example, a passenger side door which is fitted with a hinge requires a relatively large open space beside the vehicle to enable the door to be opened without striking another vehicle or object. Consequently, attempts have been made to improve upon
15 the conventional vehicle passenger door.

- [3] For instance, sliding doors have been developed for minivans as a means for providing improved access to the vehicle interior. Typically, the sliding vehicle door is mounted to the vehicle via a support mechanism which includes an upper track, a center
20 track, and a lower track on which the sliding door is supported. Although such configurations are widely used, typical sliding door support mechanisms would not be suitable for use with a front door due to the lack of support for an upper track ahead of the windshield. Consequently, there remains a need for an improved vehicle passenger door which allows access to the vehicle interior without limitation from the proximity of the
25 vehicle to adjacent vehicles.

SUMMARY OF THE INVENTION

- [4] According to one aspect of the present invention, there is provided a vehicle which includes a vehicle body, a vehicle door, and a pivot arm. The vehicle body has an
30 interior, and a passenger door way which exposes the vehicle interior. The pivot arm has a

first end pivotally coupled to the vehicle body, and a second end pivotally coupled to the vehicle door. The vehicle door slidably engages a track on the sill of the doorway. With this arrangement, the vehicle door moves between a closed position in which the door is disposed within the doorway and an open position in which the door exposes the interior, about a
5 radius substantially less than the length of the door.

[5] According to another aspect of the present invention, there is provided a vehicle door for fitting to a vehicle body. The vehicle body has a vehicle interior and a passenger doorway exposing the vehicle interior. The vehicle door includes a vehicle door
10 frame, and a pivot arm coupled to the door frame. The door frame includes an upper portion, a lower portion, and a pair of opposite sides extending between the upper and lower portions. The pivot arm is coupled to the door frame adjacent one of the opposite sides, and includes a pair of opposite ends. One of the ends of the pivot arm includes a first hinge for pivotally
coupling the pivot arm to the vehicle body about a first pivot axis. The other end includes a
15 second hinge pivotally coupling the door frame to the pivot arm about a second pivot axis.

BRIEF DESCRIPTION OF THE DRAWINGS

[6] The invention will now be described, by way of example only, with reference to the drawings, in which:

20

[7] Fig. 1 is an isometric view of a vehicle showing the vehicle door in a closed position;

[8] Fig. 2 is an isometric view of the vehicle shown in Fig. 1, depicting the
25 vehicle door in an intermediate position in which the front part of the door is held outwardly from the vehicle by the pivot arm;

[9] Fig. 3 is an isometric view of the vehicle shown in Fig.1, depicting the vehicle door in a fully open position;

[10] Fig. 4 is a side view of the vehicle, showing the vehicle door in the closed position;

5 [11] Fig. 5 is an isometric view of the vehicle shown in Fig. 4, depicting the vehicle door in an intermediate position;

[12] Fig. 6 is a top view of the vehicle shown in Fig. 4, depicting the vehicle door in an intermediate position, drawn at a larger scale;

10

[13] Fig. 7 is a top view of the vehicle shown in Fig. 6, depicting the vehicle door in the open position; and

[14] Fig. 8 is a side view of a vehicle in which the pivot arm is positioned in a recessed section in the vehicle body.

15

BRIEF DESCRIPTION OF THE PREFERRED EMBODIMENT

[15] The drawings depict a vehicle, indicated generally by the numeral 100, which includes a vehicle body 102 having a vehicle interior 104, and a doorway 106 exposing the vehicle interior 104. The vehicle 100 also includes a vehicle door 108 and a pivot arm 110.

20

[16] The vehicle door 108 is conventional in construction, and comprises an upper portion 142, a lower portion 144, and first and second ends 146, 148 extending between the upper portion 142 and the lower portion 144.

25

[17] The pivot arm 110 supports the pivoting end of vehicle door 108, and facilitates movement of the vehicle door 108 between a door closed position (shown in Fig.

1) in which the vehicle door 108 is disposed in the doorway 106, and a door open position (shown in Fig. 3) in which the door 108 exposes the vehicle interior 104. Preferably, the pivot arm 110 is manufactured from steel, and comprises an elongate arm having opposite ends 112, 114. The first end 112 includes a first hinge 113 which pivotally couples the pivot
5 arm 110 to the vehicle body 102 about a first pivot axis. The second end 114 includes a second hinge 115 pivotally coupled to the vehicle door 108 at the first end 146. Preferably, the hinges 113, 115 have a detent to thereby hold the vehicle door 108 in an opened position.

[18] A latch 124 is shown mounted on one side of the vehicle door 108, and a
10 striker 117 is shown mounted on the body 102. Alternately, in one variation, the latch 124 is mounted on the body 102, with the striker 117 being mounted on the vehicle door 108. In yet another variation, the latch 124 is mounted on one of the pivot arm 110 and the vehicle body 102, with the striker 117 being mounted on the other of the pivot arm 110 and the vehicle body 102. In each case, the latch 124 and the striker 117 cooperate to secure the vehicle door
15 108 in the door closed position.

[19] The rearward end of the door 108 is provided with a latch 129. A striker 127 is mounted on the side 128 of the doorway 106. Also, typically the first pivot axis and the second pivot axis are vertical and are parallel to one another so as to minimize vertical
20 movement of the vehicle door 108 as the vehicle door 108 moves between the open and closed positions. However, as will become apparent, the first and second pivot axes may have a different orientation so as to provide a different movement to the vehicle door 108.

[20] As shown in Figs. 2, 4 and 8, the vehicle body 102 includes a body panel 116
25 disposed adjacent to and forward of the passenger doorway 106. Preferably, the body panel 116 includes a recessed section 118, with the first hinge 113 being secured to the vehicle body 102 at a fore position of the recessed section 118 (Fig. 2). The recessed section 118 is

configured to receive the pivot arm 110 therein when the vehicle door 108 is disposed in the door closed position. Preferably, the pivot arm 110 and the recessed section 118 have a substantially horizontal orientation. However, the pivot arm 110 and the recessed section 118 may be inclined from horizontal if desired.

5

[21] As shown in Fig. 5, the vehicle door 108 includes a release handle 120 operatively coupled to the pawl of the door latches 124, 129 in a manner well known in the art. The release handle 120 is moveable to release the door latches 124, 129 in a conventional manner.

10

[22] As shown in Figs. 6 and 7, preferably the sill of the doorway 106 includes a guide track 122 disposed adjacent a lower portion of the doorway 106. The vehicle door 108 includes a guide arm or pin 125 which extends from the rearward lower portion of the vehicle door 108 and is received within the guide track 122.

15

[23] As shown in Figs. 5 and 7, the doorway 106 also has first and second sides 126, 128, and the pivot arm 110 is disposed adjacent the first side 126. Preferably, the guide track 122 includes a substantially linear portion 130 extending longitudinally between the opposite sides 126, 128, and an arcuate end portion 132 which is disposed adjacent the rearward second side 128. With this arrangement, the door 108 follows the contour of the doorway 106 along a substantial portion thereof, and then moves inwardly towards the vehicle interior 104 as the door 108 approaches the closed position.

20

[24] The vehicle door 108 operates as follows. Initially, the vehicle door 108 is in the closed position, closing the passenger doorway 106. The door latches 124, 129 retain the vehicle door 108 in the closed position. To open the vehicle door 108, the vehicle owner lifts the door handle 120, thereby releasing the latches 124, 129. The vehicle owner then applies

25

force, via the door handle 120, in the forward direction and slightly outwards from the vehicle interior 104.

[25] The applied force causes the pivot arm 110 to rotate about the first axis at the first hinge, and the vehicle door 108 to rotate relative to the pivot arm 110 at the second hinge 115. As a result, the forward end of the vehicle door 108 moves outwards slightly from the vehicle body 102. The second end 148 of the vehicle door 108 follows the contour of the guide track 122. Consequently, initially the second end 148 moves laterally outwards from the vehicle interior 106. As the applied force continues, the first end 146 of the vehicle door 108 continues to move outwards from the vehicle body 102 and towards the first side 126 of the doorway 106, and the second end 148 of the vehicle door 108 moves along the linear portion of the guide track 122, following the contour of the track 122.

[26] The vehicle owner continues to apply force forwardly until the vehicle door 108 reaches the fully opened position, thereby exposing the vehicle interior 106. The door continues to travel until the detents of the hinges 113, 115 secure the vehicle door 108 in the open position. Additionally, a detent may be provided on the guide track 122 to hold the door in the open position.

[27] To return the vehicle door 108 to the closed position, the vehicle operator urges the door 108 rearwardly overcoming the bias of the hinges 113, 115. The door 108 travels rearwardly until the latches 124, 129 engage the door in the closed position. As will be apparent, movement of the vehicle door 108 during the closing phase will be opposite to that during the opening phase, as described above.

25

[28] It will be evident to those skilled in the art that the invention can take many forms, and that such forms are within the scope of the invention as claimed. Therefore, the

scope of the appended claims should not be limited to the description of the preferred versions contained herein.

WE CLAIM:

1. A vehicle door system comprising:
a door;
5 a pivot arm having a first end pivotally connected a first end of the door, and a second
end pivotally connectable to the vehicle; and
a guide mounted on a second end of the door for engagement with a guide track on
the vehicle, the pivot arm and the guide cooperating to cause the door to pivot and slide
relative to the vehicle as the door moves between an open and a closed position.
10
2. The door system according to claim 1, wherein the first end of the pivot arm includes
a first hinge pivotally coupling the pivot arm to the vehicle body about a first pivot axis, and
the second end of the pivot arm includes a second hinge pivotally coupling the vehicle door
to the pivot arm about a second pivot axis, the first pivot axis comprising a vertical axis and
15 being parallel to the second pivot axis.
3. The door system according to claim 2, wherein the vehicle body includes a body
panel disposed adjacent the passenger doorway, the body panel including a recessed section,
the first hinge being disposed proximate the recessed section, the recessed section being
20 configured to receive the pivot arm therein when the vehicle door is disposed in the door
closed position.
4. The door system according to claim 3, wherein the recessed section comprises a
substantially horizontal recessed section, and is configured to maintain the pivot arm flush
25 with the body panel when the vehicle door is disposed in the door closed position.

5. The vehicle according to claim 2, wherein one of the hinges includes a latch configured for arresting the vehicle door in one of the door closed position and the door open position.

5 6. The vehicle according to claim 5, wherein the vehicle door includes a release handle having a released position and an actuated position, and the latch comprises a pawl coupled to the release handle, and a detent configured for receiving the pawl within for retaining the vehicle door in the arrested position when the release handle is disposed in the released position.

10 7. The vehicle according to claim 2, wherein the doorway includes a guide track disposed adjacent a lower portion thereof, and the vehicle door includes a guide arm received within the guide track for supporting the vehicle door.

15 8. The vehicle according to claim 7, wherein the doorway has a pair of opposite sides, the pivot arm is disposed adjacent one of the opposite sides, and the guide track comprises a substantially linear guide track extending between the opposite sides, the linear guide track including an arcuate end disposed adjacent the other of the opposite sides and extending inwardly into the vehicle interior.

20 9. A vehicle door for fitting to a vehicle body, the vehicle body including a vehicle interior and a passenger doorway exposing the vehicle interior, the vehicle door comprising:
a vehicle door frame including an upper portion, a lower portion, and a pair of opposite sides extending between the upper and lower portions; and
25 a pivot arm coupled to the door frame adjacent one of the opposite sides, the pivot arm including a pair of opposite ends, a first of the opposite ends including a first hinge for pivotally coupling the pivot arm to the vehicle body about a first pivot axis, the second end

including a second hinge pivotally coupling the vehicle door frame to the support arm about a second pivot axis.

10 The vehicle door according to claim 9, wherein the first pivot axis is parallel to the
5 second pivot axis.

11. The vehicle door according to claim 9, wherein the vehicle door frame includes a
release handle operable between a released position and an actuated position, and one of the
hinges includes a latch configured for arresting pivotal movement of the vehicle door, the
10 latch comprising a pawl coupled to the release handle, and a detent configured for receiving
the pawl within for retaining the vehicle door in the arrested position when the release handle
is disposed in the released position.

12. The vehicle door according to claim 11, wherein the doorway includes a guide track,
15 and the vehicle door includes a guide arm disposed adjacent the lower portion for guiding the
vehicle door along the guide track.

1/4

FIG. 1.

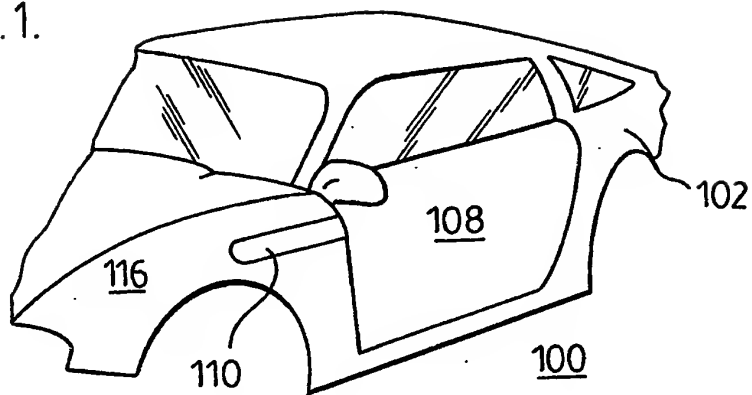


FIG. 2.






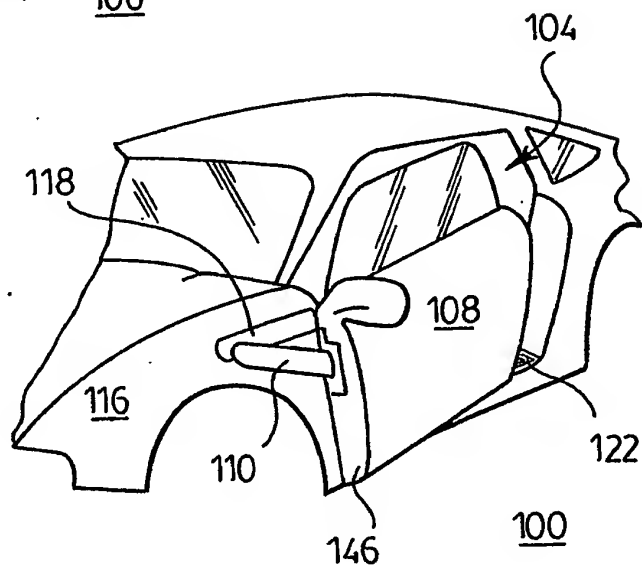


FIG. 3.

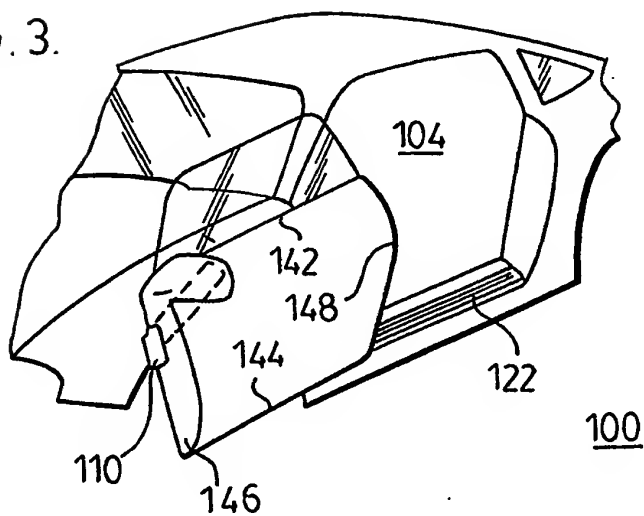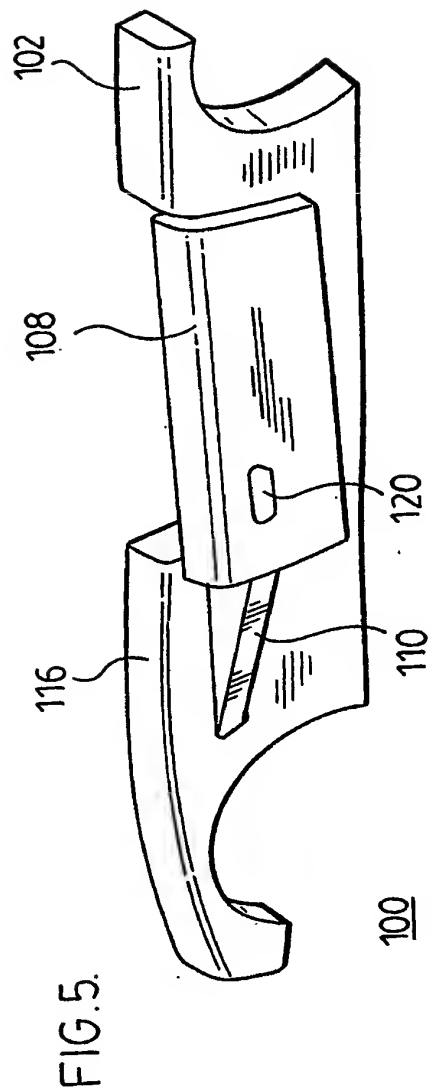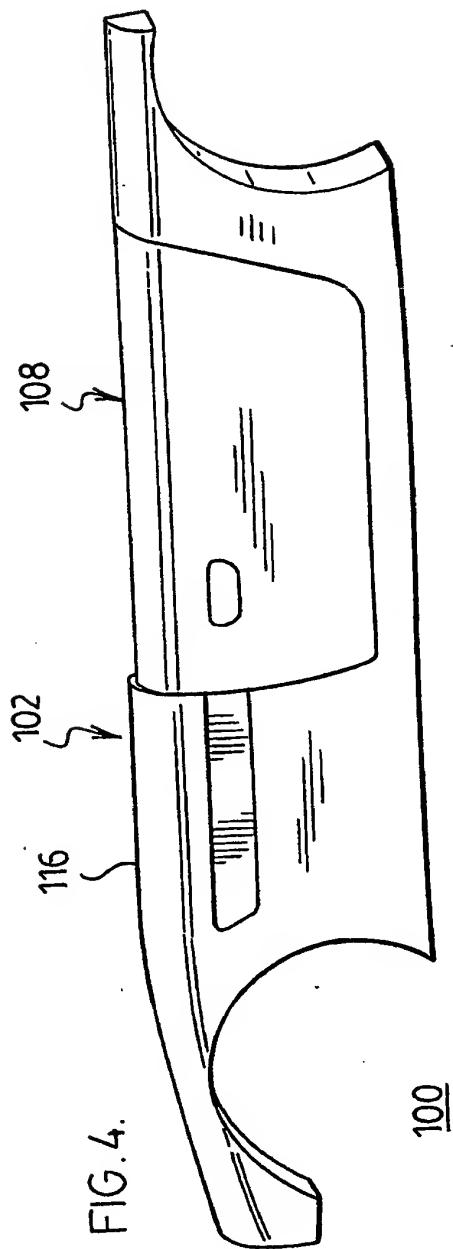

2/4

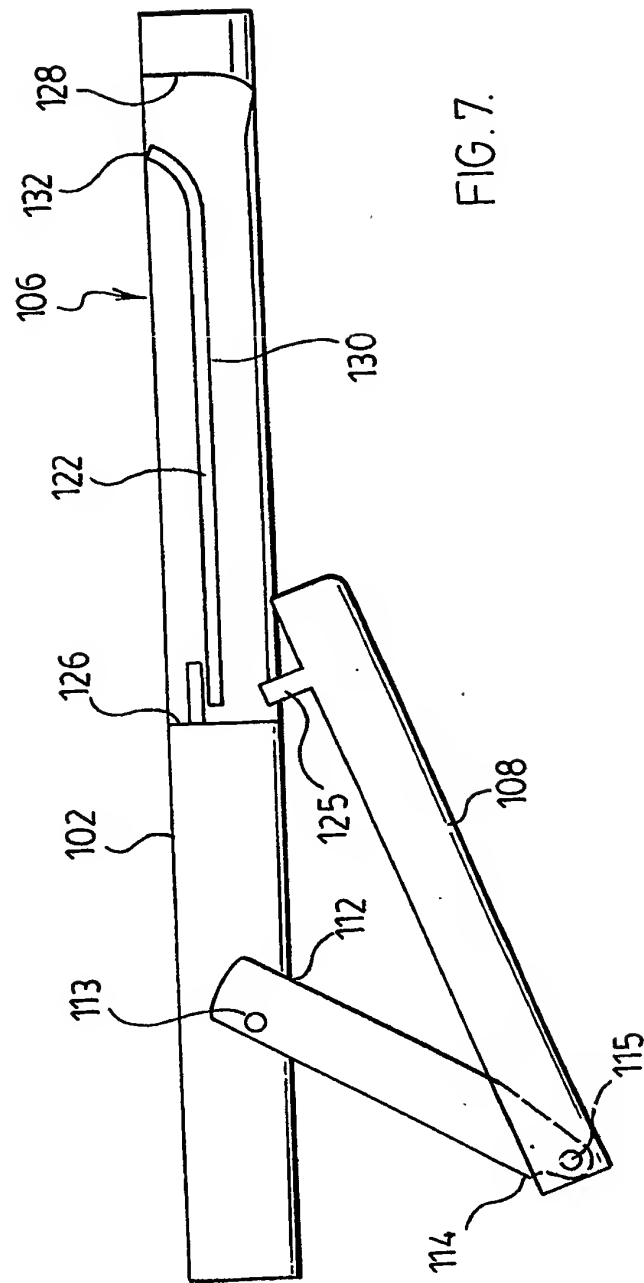

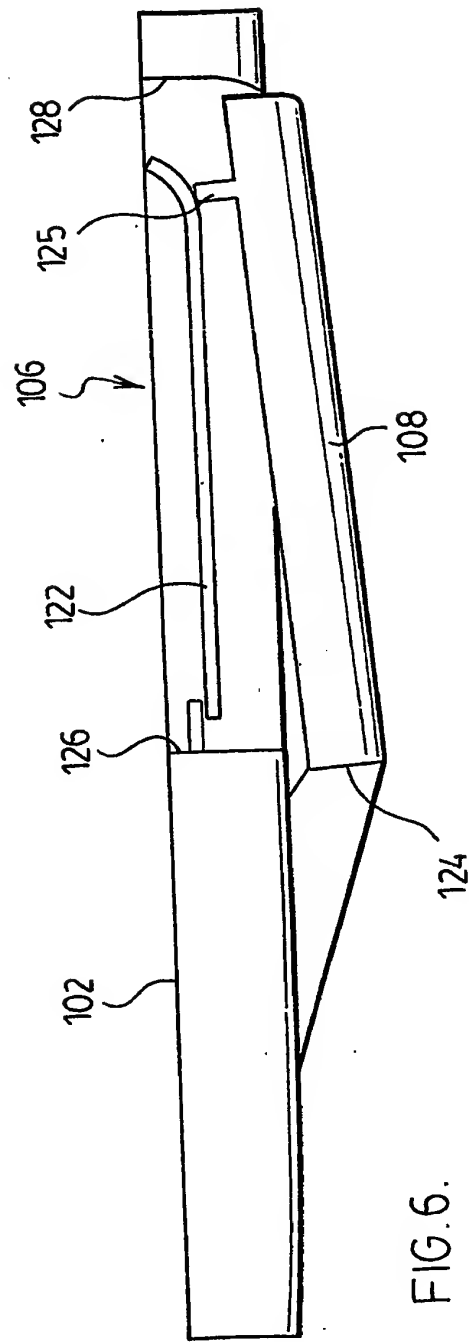

4/4

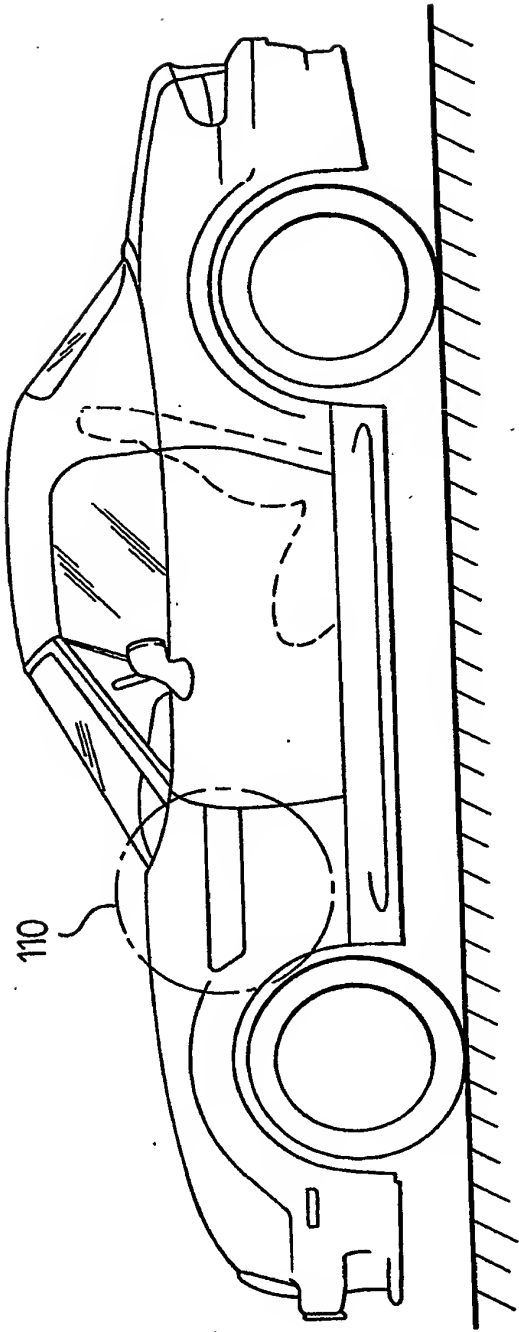


FIG. 8.

100

INTERNATIONAL SEARCH REPORT

International Application No.

PCT/CA 03/00890

A. CLASSIFICATION OF SUBJECT MATTER

IPC 7 B60J5/06

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 7 B60J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

EPO-Internal, WPI Data

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	FR 2 804 380 A (RENAULT) 3 August 2001 (2001-08-03) the whole document	1,2
A	US 6 030 024 A (SCHMIDHUBER HORST ET AL) 29 February 2000 (2000-02-29) figures 1-4	1
A	US 6 382 705 B1 (LANG STEVEN CRAIG ET AL) 7 May 2002 (2002-05-07) figures 1-7	1
A	GB 890 165 A (FORD MOTOR CO) 28 February 1962 (1962-02-28) figures 1-8	1
	--- -/-	

☒ Further documents are listed in the continuation of box C.☒ Patent family members are listed in annex.

* Special categories of cited documents:

- "A" document defining the general state of the art which is not considered to be of particular relevance
- "E" earlier document but published on or after the international filing date
- "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- "O" document referring to an oral disclosure, use, exhibition or other means
- "P" document published prior to the international filing date but later than the priority date claimed

- "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention
- "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone
- "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.
- "&" document member of the same patent family

Date of the actual completion of the international search

15 September 2003

Date of mailing of the international search report

23/09/2003

Name and mailing address of the ISA
European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Thomas, C

INTERNATIONAL SEARCH REPORT

International Application No

PCT/C/00890

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	DE 12 54 483 B (DAIMLER BENZ AG) 16 November 1967 (1967-11-16) figures 1-9 ---	1
A	GB 2 049 774 A (FIAT AUTO SPA) 31 December 1980 (1980-12-31) figures 1-4 ---	1
A	DE 11 74 183 B (DAIMLER BENZ AG) 16 July 1964 (1964-07-16) ---	
A	GB 1 128 645 A (VAUXHALL MOTORS LTD) 25 September 1968 (1968-09-25) ---	
A	US 4 135 760 A (GROSSBACH ALFRED) 23 January 1979 (1979-01-23) ---	
A	US 6 183 039 B1 (KOHUT GEORGE RODNEY ET AL) 6 February 2001 (2001-02-06) -----	

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/CN/00890

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
FR 2804380	A	03-08-2001	FR 2804380 A1	03-08-2001
			EP 1252033 A1	30-10-2002
			WO 0156823 A1	09-08-2001
			JP 2003521413 T	15-07-2003
			US 2003009846 A1	16-01-2003
US 6030024	A	29-02-2000	DE 19704811 C1	01-10-1998
			FR 2759326 A1	14-08-1998
			TR 9800188 A2	21-08-1998
US 6382705	B1	07-05-2002	NONE	
GB 890165	A	28-02-1962	DE 1198224 B	05-08-1965
DE 1254483	B	16-11-1967	DE 1190815 B	08-04-1965
			FR 1301703 A	17-08-1962
			GB 948512 A	05-02-1964
			US 3195945 A	20-07-1965
GB 2049774	A	31-12-1980	IT 1118681 B	03-03-1986
			DE 7931597 U1	12-03-1981
			FR 2456824 A1	12-12-1980
DE 1174183	B	16-07-1964	FR 1285896 A	23-02-1962
			GB 927058 A	22-05-1963
GB 1128645	A	25-09-1968	NONE	
US 4135760	A	23-01-1979	DE 2624296 A1	15-12-1977
			CA 1057795 A1	03-07-1979
			ES 459336 A1	16-03-1978
			FR 2353411 A1	30-12-1977
			GB 1580838 A	03-12-1980
			IT 1085814 B	28-05-1985
			JP 52147825 A	08-12-1977
US 6183039	B1	06-02-2001	EP 1153189 A1	14-11-2001
			WO 0046474 A1	10-08-2000